

HOTEL LOCK

HL200





HOTEL LOCK

Enhancing Guest Comfort!



Card



Manual key



Battery



Defination :

HL200: The HL200 hotel lock from eSSL-security is a Secure, contactless RFID lock designed for hotel with time-based card access & audit tracking. It ensures guest convience, strong security, & low cost, easy Installation.


Technical Specification:

- Power : 4 x 1.5V AA alkaline batteries
- Door Thickness : 35-65mm
- Battery Location : Inside of the back lock
- Material
- Handles: Zinc Alloy Lock body: Stainless steel quality SUS304
- Metal Finishes : Silver
- Locking Mechanism : Electro-mechanical locking mechanism
- Supported RFID Standard : 13.56MHz technology ISO 14443 A (MIFARE Classic)
- Emergency Opening Options : Emergency Opening with Mechanical cylinder

Features:

- Stand alone electronic lock with RFID technology.
- High security stainless steel mortise lockcase available in ANSI, AUS and EURO versions.
- 3-point stainless steel latch construction with antifriction mechanism.
- Panic release function - the deadbolt and latch are automatically retracted by inside handle for easy regress in emergency situation.
- Future proof re-programmable FLASH RAM lock memory.
- Compatible with BIS HOTEL software platform.
- High security mechanical override cylinder available.

HOTEL LOCK SOLUTION

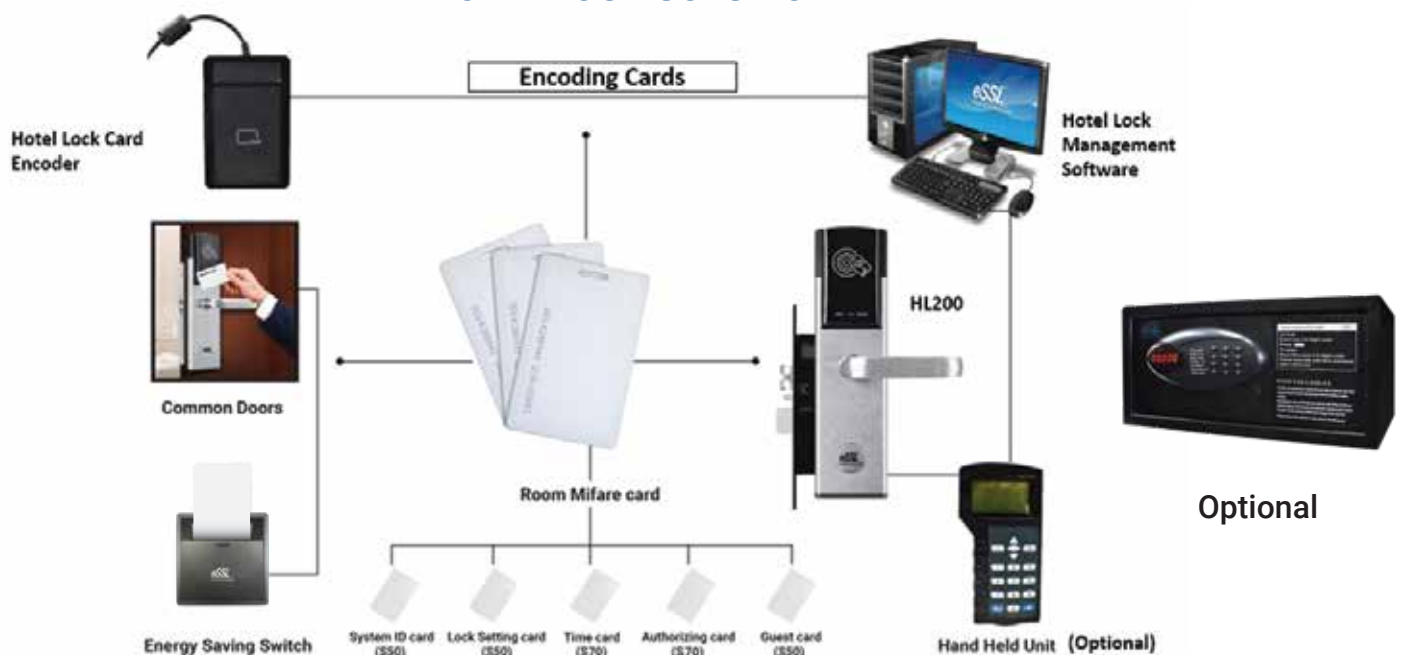

Handheld Service Unit for HL 200

It's a small device, staff use to do hotel task easily (like transferring the data).

- Dimensions(LxWxD) : 155 x 80 x 28 mm
- Voltage: 6V DC
- Minimum standby time : 90 hours
- Type of batteries: 4 AA alkaline batteries - 1.5V
- Operation temperature: -10°C to 60°C
- Connector : USB type B



Energy Saving Switch

It's electric circuit, Automatically turn off room electricity when the guest leaves, reducing energy cost.

- Card Type : Mifare Card Only | Frequency : 13.56Mhz
- Working Voltage : AC220V | Working Temperature: -10°C -60°C
- Load Working Current : 30 A | Internal agreement: RS485



RFID Encoder and Updater

- Protocol : USB HID Keyboard Class
- Connector Type : Standard Type A
- Power source : From USB port
- Speed : USB Full Speed (12Mbps)
- Supply Current : 5V | Supply Current : Max.200 mA
- Dimensions : 120.5mm (L) 72.0 mm (w) X 20.4 mm (H)
- Color : Black | LED : 2 single-color : Red and Green



S50 / S70 Hotel Lock Mifare Cards

- Contactless transmission of data and supply energy (no battery needed)
- Operating frequency : 13.56 MHz
- Typical ticketing transaction : < 100 ms (including backup management)
- S70 (used for) : Time card , Authorizing Card and Query Card, Terminating Card
- S50 (used for) : Guest Card, emergency card, Staff card, temporary card



Our premium model collection



HL400



HL500



HL600

HOTEL LOCK

Protecting Every Room, Every Guest.

HL600

HL500

HL400



Manual key



RFID Card



4xAA alkaline
battery



Led indicator

